

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)


PCT

(10) International Publication Number
WO 2005/027755 A1

- (51) International Patent Classification⁷: **A61B 17/17**
- (21) International Application Number:
PCT/GB2004/003271
- (22) International Filing Date: 28 July 2004 (28.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0322084.5 22 September 2003 (22.09.2003) GB
- (71) Applicant (for all designated States except US): **DEPUY INTERNATIONAL, LTD.** [GB/GB]; St. Anthony's Road, Beeston Leeds LS11 8DT (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MOORE, Gary** [GB/GB]; 74 Aire Road, Wetherby, West Yorkshire LS22 7UE (GB). **BIRKBECK, Alec** [GB/GB]; 1B Ashleigh Road, West Park, Leeds LS16 5AX (GB).
- (74) Agent: **BELCHER, Simon, James;** Urquhart-Dykes & Lord LLP, Tower North Central, Merrion Way, Leeds LS2 8PA (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: A DRILL GUIDE ASSEMBLY

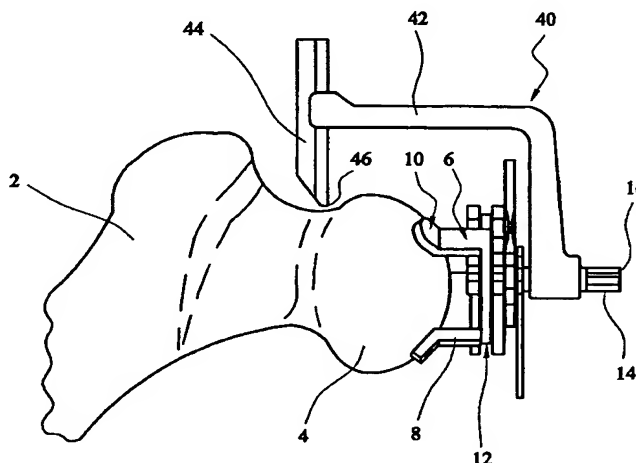

(57) Abstract: A drill guide assembly for determining the axis for drilling a bore to receive a component of an orthopaedic joint prosthesis, includes a drill guide (14) having a sleeve (16) and a bulb (18) at one end of the sleeve (16). A frame (6), which can be fastened to the bone, includes a housing (22) which defines a recess (20) in which the drill guide bulb (18) can be received with the drill guide sleeve (16) extending out of the recess (20), in a direction away from the bone, so that the angular orientation of the drill guide sleeve (16) relative to the housing (22) can be adjusted by movement of the bulb (18) within the recess (20). The drill guide can be locked relative to the housing against angular adjustment by a clamp which comprises a lower pair of clamping surfaces provided by the drill guide bulb and the internal wall of the recess respectively, and an upper pair of clamping surfaces on the drill guide and the housing respectively.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.